


Cordtex™

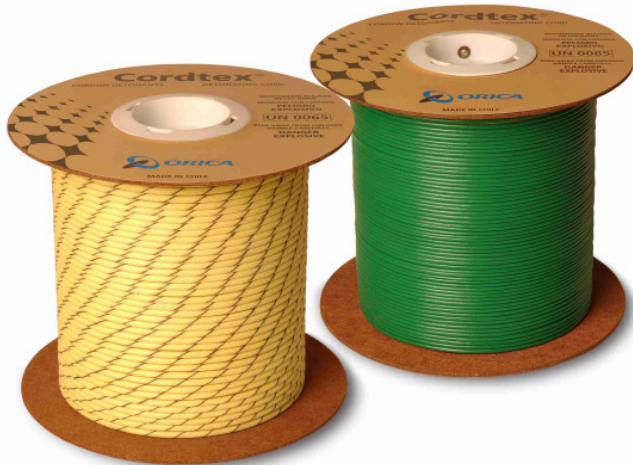

Description

Resistant and flexible detonating cord, made of a PETN core covered by a fiber fabric, the latter wrapped by another plastic coating (*Cordtex™ P*) or wax coating (*Cordtex™ W*).

The *Cordtex™* detonating cord meets most requirements of mines, quarries and civil works.

Application

This product can be used in open pit mining, underground mining, quarries and civil works. Its main functionalities are connecting blastings as trunk lines, initiating non-electric detonators and be used in descending lines.

Key benefits

Benefits include:

- Excellent resistance to traction, abrasion and humidity.
- Safe and easy to connect product.

Recommendations for Use

- When using the detonating cord in blasting, the laying of the trunk line should complete a closed circuit, in order to allow all connected boreholes to receive the initiation signal from two different directions.
- Use the product that has been stored longer.
- When the detonating cord is connected through knots (descending lines connected to trunk lines), the knot connection should make a right angle.
- When connecting an *Exel™* detonator to *Cordtex™* detonating cord, a “J” Connector should be used to assure the detonator is firmly joined to the detonating cord in a right angle.

Technical Properties

Cordtex™ P and *Cordtex™ W* detonating cords are available in the following gramages:

| Name | Nominal load (gr/m) | Colour |
|--------------------------|---------------------|--------|
| <i>Cordtex™ W</i> | | |
| <i>Cordtex™ 3,6W</i> | 3,6 | Pink |
| <i>Cordtex™ 5W</i> | 5,0 | Yellow |
| <i>Cordtex™ 5W UG</i> | 5,0 | Yellow |
| <i>Cordtex™ 10W</i> | 10,0 | Red |
| <i>Cordtex™ P</i> | | |
| <i>Cordtex™ 3,6P</i> | 3,6 | Orange |
| <i>Cordtex™ 5P</i> | 5,0 | Green |
| <i>Cordtex™ 10P</i> | 10,0 | Red |
| <i>Cordtex™ 42P</i> | 42,0 | Orange |
| <i>Cordtex™ 70P</i> | 70,0 | Green |

Packaging

Cordtex™ P and *Cordtex™ W* is available in the quantity per box indicated in the following table:

| Name | Nominal load (gr/m) | Spool Unit/box | Classification Code 1.1D | |
|--------------------------|---------------------|----------------|--------------------------|--------|
| | | | m/box | kg/box |
| <i>Cordtex™ W</i> | | | | |
| <i>Cordtex™ 3,6W</i> | 3,6 | 2/900 | 1800 | 16 |
| <i>Cordtex™ 5W</i> | 5,0 | 2/700 | 1400 | 16 |
| <i>Cordtex™ 5W UG</i> | 5,0 | 2/250 | 500 | 6,5 |
| <i>Cordtex™ 10W</i> | 10,0 | 2/500 | 1000 | 18 |
| <i>Cordtex™ P</i> | | | | |
| <i>Cordtex™ 3,6P</i> | 3,6 | 2/900 | 1800 | 16 |
| <i>Cordtex™ 5P</i> | 5,0 | 2/700 | 1400 | 16 |
| <i>Cordtex™ 10P</i> | 10,0 | 2/500 | 1000 | 18 |
| <i>Cordtex™ 42P</i> | 42,0 | 2/150 | 300 | 18 |
| <i>Cordtex™ 70P</i> | 70,0 | 2/50 | 100 | |

Cordtex™

Storage And Handling

Product Classification

| | |
|------------------|-----------------|
| Authorised Name: | <i>Cordtex™</i> |
| Shipping Name: | Detonating Cord |
| UN No. | 0065 |
| Class Code | 1.1D |

All regulations on the handling and use of such explosives apply.

Storage

Store in authorized magazine at moderate temperature, low humidity and appropriate ventilation. The manufacturer guarantees the quality of the product for a two-year period if stored in appropriate conditions.

Disposal

Disposal of explosives materials can be hazardous. Methods for safe disposal of explosives may vary depending on the user's situation. Please contact a local Orica representative for information on safe practices.

Safety

Cordtex™ detonating cord is insensible to early or accidental detonation due to heat, impact, friction electric discharges or other conditions that generally come about in mining sites; however, it is advisable not to subject it to conditions other than those specified by the manufacturer.

Trademarks

The word Orica, the Ring device and the Orica mark are trademarks of Orica Group Companies. *Cordtex™* and *Exel™* are trademarks of Orica Explosives Technology Pty Ltd. ACN 075 659 353, 1 Nicholson Street, Melbourne VIC, Australia.

Disclaimer

All information contained in this data sheet is accurate and up-to-date at publication. Since Orica cannot anticipate or control the conditions under which this information and its products may be used, each user should review the information in the specific context of the intended application. To the maximum extent permitted by law, Orica will not be responsible for damages of any nature resulting from the use of or reliance upon the information in this data sheet. No express or implied warranties are given, other than those implied mandatory by law.

Orica Mining Services, LA PORTADA Plant

Camino a Mejillones Km. 18, Antofagasta - Chile
Telephone: +56 55 565 634
Fax: +56 55 565 633

Emergency telephones

In Chile: 55 565 633 / 9 873 47 84
Out of Chile: +56 55 565 633 / +56 99 873 47 84